

Minimum Physical Shed Setup Checklist

Source type: DubboEwaste repository document

Repository path: docs/MINIMUM-PHYSICAL-SHED-SETUP-CHECKLIST.md

Source commit: c2103b6090c8

Pack generated: 6 October 2026

Minimum Physical Shed Setup Checklist

Purpose: the smallest practical physical setup needed to run the Dubbo Phase 0 ITAD / electronics reuse pilot without pretending the shed is a warehouse.

Status: operational setup checklist only. Completing this checklist does not by itself establish Council approval, lease/landlord permission, insurance cover, Fair Trading compliance, fire/electrical adequacy, downstream acceptance or permission for general public intake.

Use with:

- PHASE-0-LAUNCH-GATES.md (PHASE-0-LAUNCH-GATES.md)
- BENCH-SOP-AND-LAYOUT.md (BENCH-SOP-AND-LAYOUT.md)
- EWASTE-FACILITY-ZONE-BENCHMARK-AND-SHED-DESIGN.md (EWASTE-FACILITY-ZONE-BENCHMARK-AND-SHED-DESIGN.md)
- RESEARCH-12-PREMISES-PHYSICAL-FLOW-CAPACITY.md (RESEARCH-12-PREMISES-PHYSICAL-FLOW-CAPACITY.md)
- ../templates/phase-0-readiness-and-capacity-record.md (../templates/phase-0-readiness-and-capacity-record.md)

1. Premises basics

- [] Shed/work area is dry, watertight and secure.
- [] No active mould, water ingress or known damp surface is used for equipment storage.
- [] Entry/exit is clear and usable.
- [] Walkway stays clear.
- [] No ordinary inventory is stored on the floor.
- [] Work/storage area is separate enough from household use to keep children, pets, food and personal clutter out while operating.
- [] The exact area intended for business use is measured and documented privately.
- [] Any unusable/damp/no-storage area is marked as excluded.

Hard stop: do not store valuable resale stock or unwiped client/business devices in a shed that is not demonstrably dry, secure and suitable.

2. Minimum furniture and storage

Workbench

- ☐ One solid workbench is available.
- ☐ Bench has adequate lighting.
- ☐ Bench is kept as a processing position, not storage.
- ☐ Only one active device per operator work position.
- ☐ Bench can be reset between restricted/unwiped and clean/cleared work.

You do not need separate wipe, test and repair benches for Phase 0.

A — Intake / unassessed

- ☐ One clearly labelled intake tray/shelf exists near the handoff point.
- ☐ Initial cap: 2 devices or one small labelled batch, whichever is lower.
- ☐ Every accepted device gets an asset/source ID immediately.
- ☐ Intake shelf is not used for long-term storage.

B — Unwiped / restricted

- ☐ One lockable cabinet, lockable cupboard or genuinely restricted storage position exists.
- ☐ It is clearly labelled UNWIPED — RESTRICTED.
- ☐ It is not accessible to visitors.
- ☐ Sale-ready stock is never stored in the same location.
- ☐ Initial cap: 4 data-bearing devices.
- ☐ Full zone = no new data-bearing intake.

D — Repair / WIP

- ☐ One small repair/WIP shelf or rack exists beside the bench.
- ☐ Initial cap: 3 active devices.
- ☐ Each device has a fault/goal, next action and review date.
- ☐ No device is allowed to become indefinite “I’ll get to it later” stock.

E/F — Cleared QA / sale-ready

- ☐ One clean shelf exists for cleared/QA stock.
- ☐ One clean shelf or clearly separated section exists for READY FOR SALE / REUSE.
- ☐ Clean/released stock is physically separated from unwiped devices.
- ☐ Initial QA cap: 2 devices.
- ☐ Initial sale-ready cap: 4 devices.

G — Parts / donor

- ☐ A small fixed number of labelled, lidded tubs exists.
- ☐ Suggested initial categories:
 - ☐ RAM
 - ☐ known-status SSD/HDD/media
 - ☐ chargers/adapters


- [] laptop donor parts
- [] cables/known-good accessories
- [] No loose unidentified storage media.
- [] No unsafe/swollen batteries.
- [] Bin full = sort/use/outbound before adding another bin.
- [] No miscellaneous “might be useful one day” pile.

H — Return / downstream / outbound

- [] One labelled outbound crate/shelf exists near the exit where practical.
- [] Every item in outbound has a named destination and next date.
- [] Return, recycler/destruction and sold dispatch assets remain identifiable.
- [] No indefinite “outbound someday” stock.

3. Physical flow

The physical shed should support this simple one-way flow:

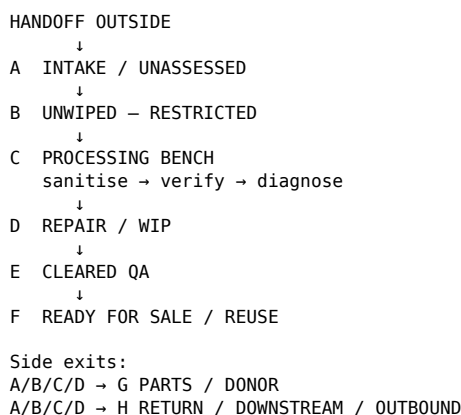

- [] Intake is close to the door.
- [] Unwiped storage is outside the visitor path.
- [] Bench acts as the controlled crossing point between dirty/restricted and clean/released states.
- [] Sale-ready stock is as far from the unwiped/intake lane as practical.
- [] Outbound is near the exit where practical.
- [] Nothing blocks the exit.

4. Electrical and charging basics

- [] Power boards, chargers and leads are visibly sound and suitable for use.
- [] Appropriate RCD/electrical protection for the actual workspace is confirmed.
- [] No damaged leads/plugs are used.
- [] No unattended charging.
- [] No overnight charging.
- [] No charging beside the only exit.

- [] Charging/testing happens on a suitable, stable work surface.
- [] Opened mains PSUs, mains wiring and other licensed electrical work are outside Phase 0 unless handled by a competent/licensed person as required.

5. Battery boundary

Phase 0 is not a damaged-battery collection service.

- [] Loose lithium batteries are not accepted as a normal Phase 0 stream.
- [] Visibly swollen, leaking, crushed, punctured, wet, overheated, smoking or fire-affected battery devices are refused before normal intake.
- [] There is a written response for battery danger discovered only after acceptance.
- [] If discovered after acceptance:
 - [] stop work;
 - [] do not charge or test;
 - [] keep people away from the hazard;
 - [] follow current NSW/site-specific emergency/isolation guidance;
 - [] arrange an appropriate receiver/advice pathway promptly.
- [] A generic metal box or improvised "battery bin" is not treated as proof of safe storage.

Battery hazard is an exception / stop-work path, not ordinary inventory.

6. Network and data basics

- [] Unknown devices do not join the normal home/business LAN during ordinary triage.
- [] Offline tools or an isolated/segreated test network are available where needed.
- [] Every possible data-bearing device goes to UNWIPED — RESTRICTED by default.
- [] No data-bearing asset moves to clean/sale stock without a recorded media decision and verification.
- [] Removed drives/media stay linked to the parent asset or their own media record.
- [] No loose unidentified drives.

7. Visitor and handoff boundary

- [] Customer/source handoff occurs outside the workshop or at the doorway.
- [] Visitors do not enter unwiped, repair, parts or sale-ready zones.
- [] No unattended drop-off.
- [] No gate pile.
- [] No public e-waste bin.
- [] No outdoor stockpile.
- [] One source/batch at a time where practical.
- [] A device is refused/rescheduled if there is no safe physical location available.

8. Labels and AssetFlow

Minimum physical labels:

- ☐ INTAKE / UNASSESSED
- ☐ UNWIPED — RESTRICTED
- ☐ PROCESSING BENCH
- ☐ REPAIR / WIP
- ☐ CLEARED QA
- ☐ READY FOR SALE / REUSE
- ☐ PARTS / DONOR
- ☐ OUTBOUND / RETURN

Recommended AssetFlow locations:

- ☐ SHED-HANDOFF
- ☐ SHED-A-INTAKE
- ☐ SHED-B-UNWIPED-RESTRICTED
- ☐ SHED-C-BENCH
- ☐ SHED-D-REPAIR-WIP
- ☐ SHED-E-CLEARED-QA
- ☐ SHED-F-SALE-READY
- ☐ SHED-G-PARTS
- ☐ SHED-H-OUTBOUND

Operational rule:

No physical move without a location/status event. No status release without a physical move.

If the physical location and AssetFlow record disagree, hold the asset and reconcile it before release.

9. Initial stock limit

The 20-30 device Phase 0 pilot is a cumulative sample, not simultaneous storage permission.

- ☐ Start with a provisional overall cap of 12 serialized devices physically held at once.
- ☐ Review the cap after device 5.
- ☐ Review again after device 10.
- ☐ Do not raise the cap unless:
 - ☐ every asset is easy to locate;
 - ☐ no data-state confusion has occurred;
 - ☐ no zone is chronically full;
 - ☐ repair/WIP is moving;
 - ☐ sale-ready stock is actually leaving;

- ☐ downstream routes work;
- ☐ the actual premises/insurance/capacity evidence permits it.

The 12-device figure is an operating experiment cap, not a fire, structural, insurance or regulatory limit.

10. What you do NOT need to buy yet

Do not buy warehouse infrastructure just to look professional.

You do not need for the first bounded pilot:

- ☐ warehouse
- ☐ pallet racking
- ☐ pallet jack
- ☐ forklift
- ☐ commercial cages/stillages
- ☐ industrial shredder
- ☐ dedicated destruction machine
- ☐ multiple wipe benches
- ☐ large public drop-off bin
- ☐ dedicated van
- ☐ elaborate CCTV system solely to claim “secure facility”
- ☐ industrial battery cabinet without competent site-specific advice
- ☐ large quantities of shelving
- ☐ industrial extraction/processing equipment

Buy only what the measured pilot proves you need.

11. Small useful items after the premises is cleared

Potential low-cost basics:

- ☐ strong shelving
- ☐ lockable restricted cabinet
- ☐ labels / label printer
- ☐ lidded parts tubs
- ☐ ESD-safe bench basics
- ☐ good task lighting
- ☐ appropriate smoke/fire controls after competent advice
- ☐ simple zone signage
- ☐ network isolation/segmentation equipment already justified by the data SOP

Do not buy these merely because they are listed. Reuse existing suitable equipment first.

Readiness sign-off

NOT READY

Use this status if any of these apply:

- ☐ shed is not demonstrably dry/secure/suitable;
- ☐ exit/walkway is obstructed;
- ☐ there is no restricted unwiped storage;
- ☐ there is no clean/released storage;
- ☐ battery response is undefined;
- ☐ unknown devices would need to join the home LAN;
- ☐ devices cannot be uniquely identified and located;
- ☐ stock would overflow into living/outdoor/emergency areas.

Decision: NOT READY

READY FOR SYNTHETIC TEST

All minimum physical controls above are in place, but external launch gates may still be open.

- ☐ Zone labels installed.
- ☐ AssetFlow locations created.
- ☐ Walkway/exit clear.
- ☐ Restricted and clean stock are physically separate.
- ☐ Bench reset procedure understood.
- ☐ Synthetic normal-intake drill passed.
- ☐ Synthetic full-unwiped-zone drill passed.
- ☐ Synthetic failed-wipe/data-hold drill passed.
- ☐ Synthetic MDM/lock drill passed.
- ☐ Synthetic outbound/recycler rejection drill passed.
- ☐ Battery emergency tabletop drill passed.

Decision: READY FOR SYNTHETIC TEST

READY FOR BOUNDED PHASE 0 PILOT

This status is only available when the physical setup is ready and the relevant Phase 0 launch gates for the exact pilot scope are closed/evidenced.

- ☐ Physical shed checklist complete.
- ☐ Synthetic drills passed.
- ☐ First real batch fits every zone/capacity limit.

- ☐ Council/premises position for the scope is evidenced.
- ☐ Lease/landlord position is evidenced.
- ☐ Insurance is in force for the scope.
- ☐ Fair Trading/licence/hold workflow is resolved for the scope.
- ☐ Battery/emergency procedure is evidenced.
- ☐ Data/custody records are ready.
- ☐ Downstream route exists for every accepted category.
- ☐ First batch has reserved physical positions before booking.

Decision: READY FOR BOUNDED PHASE 0 PILOT

Do not convert this status into “general public intake approved”. Public/broader intake remains a separate scale gate.